

Isotherm and Kinetic Studies on *Escherichia coli* for Cadmium-Contaminated Wastewater Treatment

¹Verwiyeh Silas Tatah, ¹David Chinonso Anih, ²Ebikonboere Mary Tekeme, ³Paul Samuel,

⁴Sulaiman Luqman Olaitan, ⁵Godswill Igenewari Yellowe, ⁶Taiwo Adebayo Sunday,

⁷Efagene Clifford, ⁸Nwanze Tobechukwu Joseph, ⁹Ugo Nwritte-Eze and ¹⁰Emmanuel Ndirimbula Linus

¹Department of Biochemistry, Faculty of Biosciences, Federal University Wukari, Taraba, Nigeria

²Department of Environmental Management and Pollution, Faculty of Environmental Management, Nigerian Maritime University, Okerenkoko, Delta State, Nigeria

³Department of Chemical Sciences, Federal University of Kashere, P.M.B. 0182 Gombe State, Nigeria

⁴Department of Chemistry, Faculty of Sciences, University of Abuja, Abuja, Nigeria

⁵Department of Civil and Environmental Engineering, Faculty of Engineering, University of Port Harcourt, Rivers State, Nigeria

⁶Department of Mechanical Engineering, Faculty of Technology, University of Ibadan, Oyo State, Nigeria

⁷Department of Chemical Engineering, Faculty of Engineering, Enugu State University of Science and Technology, Enugu State, Nigeria

⁸Department of Civil and Environmental Engineering, University of Lagos, Akoka, Lagos State, Nigeria

⁹Department of Chemical Engineering, Federal University of Technology, Akure, Ondo State, Nigeria

¹⁰Department of Pharmacology and Therapeutics, Faculty of Basic Clinical Sciences University of Maiduguri, Borno State, Nigeria

ABSTRACT

Background and Objective: Cadmium (Cd) contamination poses a major environmental and public health concern due to its toxicity, persistence, and bioaccumulation. Conventional remediation methods are often costly and inefficient, generating secondary pollution. This study aimed to evaluate the biosorption potential of *Escherichia coli* isolated from a plastic recycling plant for the removal of Cd (II) ions from aqueous solutions, using isotherm and kinetic modeling to characterize adsorption behavior. **Materials and Methods:** Soil samples from a plastic recycling site were processed to isolate *E. coli*, identified through Gram staining and biochemical tests. Biomass was prepared and used in batch biosorption experiments under varying pH, contact time, initial Cd concentration, and biomass doses. Residual Cd levels were measured using atomic absorption spectrophotometry (AAS). Adsorption data were analyzed using Langmuir and Freundlich isotherms and kinetic models, including pseudo-first and pseudo-second order equations. **Results:** Maximum Cd (II) uptake occurred at pH 7, with equilibrium reached within 24–28 hrs. Adsorption capacity increased with initial Cd concentration until saturation. The pseudo-first order kinetic model best fitted the data, while the Langmuir isotherm showed the highest correlation, indicating monolayer adsorption on homogeneous sites. The maximum adsorption capacity was 50.013 mg/g. **Conclusion:** The findings confirm that *E. coli* biomass serves as an effective, low-cost biosorbent for Cd (II) removal under laboratory conditions. Its performance aligns with established biosorption models, supporting its potential application in wastewater treatment. Further studies on regeneration efficiency, column operations, and molecular adsorption mechanisms are recommended for practical implementation.

KEYWORDS

Escherichia coli biomass, cadmium (Cd) removal, biosorption, Langmuir isotherm, adsorption kinetics, low-cost biosorbent, plastic recycling waste, wastewater remediation, circular economy

Copyright © 2025 Tatah et al. This is an open-access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution and reproduction in any medium, provided the original work is properly cited.



INTRODUCTION

Industrialization and expanding plastic-related activities have increased heavy-metal inputs to the environment; Cd is particularly problematic due to toxicity, persistence, and bioaccumulation¹. Recent reviews document the environmental impacts of plastic recycling and related waste streams on metal contamination². Anthropogenic activities and improper waste handling further exacerbate environmental degradation and the need for affordable remediation technologies³.

Conventional physicochemical treatments (e.g., chemical precipitation, ion exchange) are effective but often costly and can generate secondary wastes; adsorption and biosorption are attractive low-cost alternatives⁴. Biosorption passive binding of metal ions onto the surfaces of biological materials, has been widely studied for Cd, Pb, Cu, and other heavy metals⁵. Proper application of isotherm and kinetic models (Langmuir, Freundlich, pseudo-first and pseudo-second order) is essential to interpret sorption behaviour and to guide scale-up⁶.

Biomasses used for biosorption include microbial cells and agricultural/industrial wastes (nutshells, husks, pods), and many studies have demonstrated high sorption capacities for such materials⁷. Comprehensive reviews of low-cost adsorbents show consistent patterns in capacity, kinetics, and influencing factors that can guide *Experimental design*⁸. Local agricultural residues and microbial isolates are especially attractive in resource-limited settings because they are inexpensive and locally available⁹⁻¹².

Several studies have characterized adsorption kinetics and isotherms for groundnut husk, Senna tora (modified and unmodified), and Dennettia tripetala, providing benchmarks for both isotherm parameters and kinetic regimes¹³⁻¹⁵. Works on alginate composites, LDH intercalates, and polymeric hydrogels illustrate engineered biosorbents with high capacities and are helpful comparators for microbial systems¹⁶. Guidance on correct isotherm selection, linearization pitfalls, and interpretation is essential to prevent misapplication of models¹⁷⁻²¹.

This study isolates *E. coli* from a plastic recycling plant and evaluates Cd (II) biosorption across pH, contact time and concentration ranges.

MATERIALS AND METHODS

Study area and sample collection: The research was conducted at the Microbiology Laboratory of the Federal University, Wukari, Taraba State, Nigeria, over six months (January to June, 2024). Wukari, a historically significant city formerly part of the defunct Gongola State, is strategically located between Taraba and Benue States. Geographically, it is bounded to the south by Benue State, to the north by Gassol Local Government Area (LGA), to the East by Donga LGA and Takum, and to the West by Ibi LGA.

Climatic conditions in Wukari are characterized by relative humidity ranging from 14 to 77%. The city covers a land area of 4,308 km² and recorded a population of approximately 241,546 during the 2006 national census. Beyond its demographic and geographic attributes, Wukari is recognized as a traditional state with a rich cultural heritage, encompassing diverse norms, values, and practices that contribute to its socio-cultural identity²².

Sample collection: A sampling site was precisely mapped out for soil sample collection, which was a plastic recycling site at Ambassador Roundabout, Wukari, Taraba State. Samples were stored at 4°C and processed within 24 hrs.

Materials: Hand gloves, cotton wool, Nutrient Agar (NA), MacConkey Agar (MA), Potato dextrose Agar (PDA), petri dish, masking tape, distilled water, wire loop, dropper, syringe and needle, measuring cylinder, test-tube, autoclave, weighing balance and pH meter, Spectrophotometer, Shakers, and Beakers.

Media preparation: The various media (PDA), Potato Destrose Agar, (MCA) MacConkey Agar, (NA) Nutrient Agar, were weighed according to the manufacturer's instructions and sterilized at 121°C for 15 min at 15 PSI.

After sterilization, it was allowed to cool to a temperature bearable to the skin.

Isolation and identification of *E. coli*: Serial dilutions were plated on MacConkey and Nutrient agar, and distinct colonies were purified. Phenotypic identification used Gram staining and standard biochemical tests (indole, citrate, TSI, catalase, oxidase)²³. Selected isolates were maintained for biosorption assays²⁴.

Preparation of biosorbent and reagents: Biomass was produced by culturing the chosen *E. coli* isolate in nutrient broth overnight, harvesting by centrifugation, washing three times with deionized water and using either wet biomass or oven-dried biomass as indicated. Analytical-grade CdCl₂ was used to prepare stock and working solutions²⁵⁻²⁷.

Batch biosorption experiments: Batch experiments were carried out with 100 mL working volume in 250 mL flasks. Parameters tested: Initial Cd concentration (5-50 mg/L), pH (3, 5, 7, 9), contact time (0-48 hrs), and biomass dose (0.1-1.0 g/100 mL). After contact, samples were centrifuged and supernatants analysed for residual Cd by AAS. Percent removal and q_e (mg/g) were calculated using standard mass-balance equations²⁸. *Experimental design* and batch vs fixed-bed considerations followed established guidance²⁹.

Isotherm and kinetic modelling: Equilibrium data were fitted to Langmuir and Freundlich isotherms; kinetics were analysed with pseudo-first and pseudo-second order models. Linear and non-linear regression approaches were used; fits were assessed by R^2 and error metrics following recommended practice¹⁷. Representative comparators and modelling strategies from the literature were used to ensure robust parameter estimation³⁰.

Data analysis: All experiments were performed in triplicate and results were reported as Mean±SD. Curve fitting and statistics were performed using standard software³¹.

RESULTS

Identification and biochemical profile of the isolate: The selected isolate demonstrated morphological and biochemical traits consistent with *Escherichia coli* (Gram-negative rods; indole positive in the tested strain)²³.

Table 1 summarizes the biochemical test results used to identify the *Escherichia coli* isolate. The table lists Gram staining, enzymatic activities, sugar fermentation profiles, and growth characteristics on MacConkey agar. These results confirm the morphological and biochemical traits consistent with *E. coli*.

Biochemical characteristics of bacterial isolates from the plastic recycling plant site. Data include Gram reaction, enzyme tests, sugar fermentation patterns, and colony morphology on MacConkey agar.

Effect of contact time: Adsorption occurred rapidly during the initial phase (0-8 hrs) and approached steady state by ~24-28 hrs. This time course is consistent with sorption profiles reported for microbial and plant-based biosorbents³².

Figure 1 presents the contact time profile for Cd (II) biosorption by *Escherichia coli*. The curve shows a rapid uptake within the first 8 hrs, followed by a slower approach to equilibrium at 24-28 hrs.

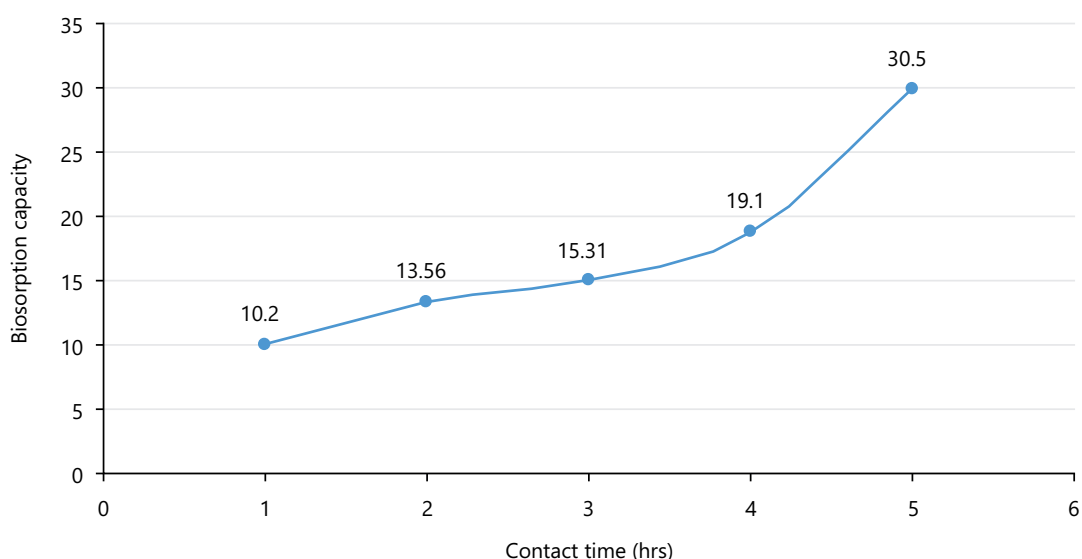


Fig. 1: Effect of contact time on the biosorption of Cd (II) ions by *Escherichia coli* isolated from a plastic recycling plant (Self-generated)

Effect of contact time on Cd (II) biosorption by *Escherichia coli* biomass. The plotted curve shows adsorption capacity (q) over time, with data points representing mean values from triplicate experiments

Table 1: Biochemical test for *E. coli*

Code	Gram Staining	Catalyst Test	Coagulase Test	Simon citrate test	Glucose test	Sucrose test	Galactose test	Oxidase
MacConkey Agar Plate1 White	Rod-Chain Shape (Purple)	+	-	+	-	-	-	+
MacConkey Agar Plate1 Pale Yellow	Cocci (Purple)	+	-	-	+	-	-	+
MacConkey Agar Plate 2 Yellow	Rod Shape (Purple)	+	-	-	+	-	-	-
MacConkey Agar Plate 2 White	Rod Shape (Purple)	+	-	-	+	+	+	+
MacConkey Agar Plate1 Yellow	Cluster Rod Shape (Purple)	+	-	-	+	+	+	-
MacConkey Agar Plate1 White	Rod Shape (Purple)	+	+	-	-	-	-	-
MacConkey Agar Plate 2 Yellow	Rod shape (Purple)	+	-	-	-	-	-	+
Plate 2 Yellow	Rod shape (Purple)	+	-	-	-	-	-	-
Plate1 White	Rod shape (Purple)	+	+	+	+	+	+	-
Plate1 Yellow	Rod shape (Purple)	+	-	+	+	-	-	-
Plate 3 Yellow	Cocci (Purple)	-	-	-	+	+	+	-

Effect of solution pH: Maximum uptake occurred at neutral pH (pH 7); adsorption decreased at low pH (proton competition) and at very high pH (possible precipitation/speciation effects). These pH dependencies align with widely reported observations for biosorbents³³.

Figure 2 illustrates the pseudo-first-order kinetic model fit for Cd (II) biosorption. The linear plot of $\log(q_e - q_t)$ versus time demonstrates a strong correlation between experimental and model-predicted values. This supports the conclusion that pseudo-first-order kinetics best describe the system.

Effect of initial metal concentration and biomass dose: The q_e increased with initial concentration until a plateau, indicating sorbent saturation was reached; increasing biomass dose increased total removal but lowered q_e (mg/g) due to site distribution effects, as discussed in batch vs column comparisons³⁴.

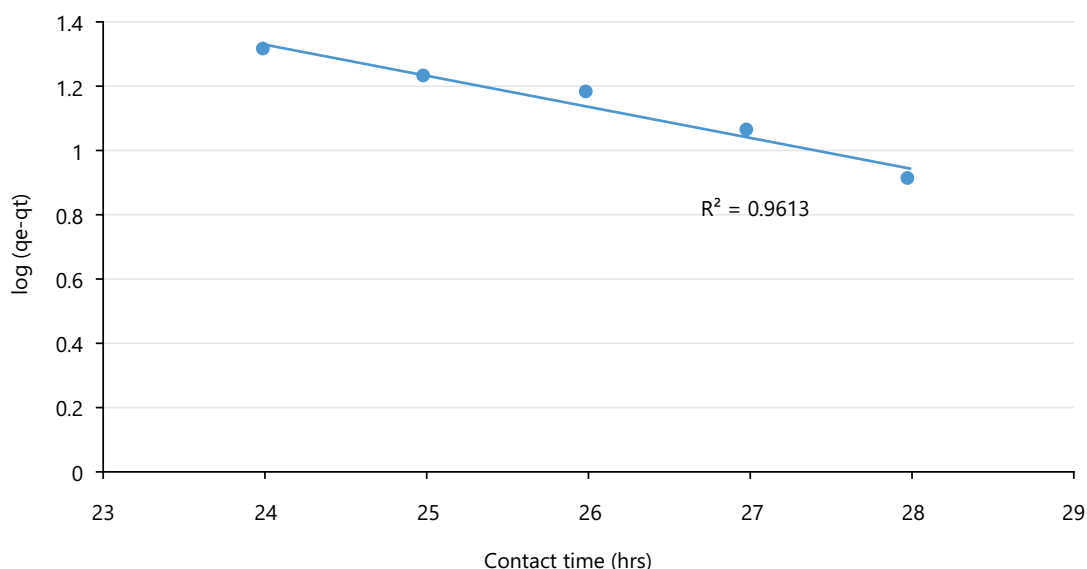


Fig. 2: The pseudo-first order model plot for the biosorption of Cd ions by *Escherichia coli* isolated from a plastic recycling plant. It's a plot of log (qe-qt) versus t derived from the pseudo-first order linear equation (Self-generated)

Pseudo-first order kinetic model plot for Cd (II) biosorption by *Escherichia coli*. The straight-line fit shows log(qe-qt) against contact time, with slope and intercept used to determine kinetic parameters

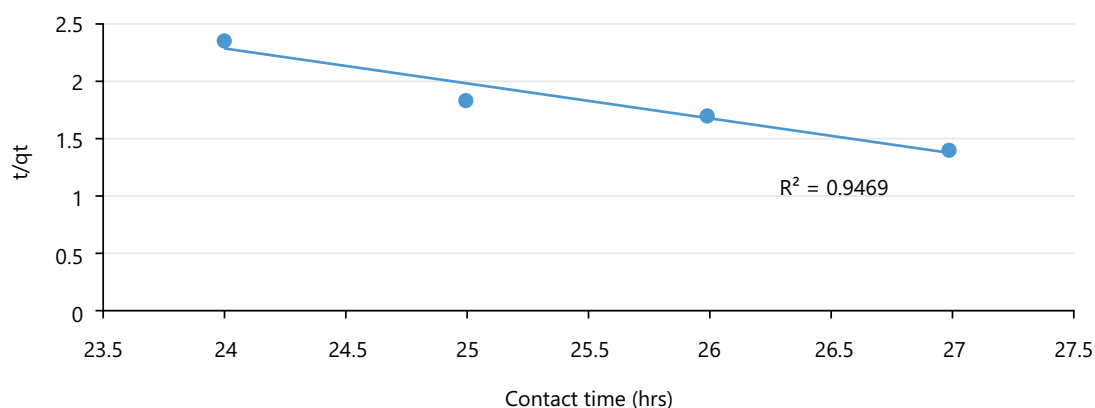


Fig. 3: The pseudo-second order model plot for the biosorption of Cd ions by *Escherichia coli* isolated from a plastic recycling plant. It's a plot of log t/qt versus t derived from the pseudo-first order linear equation (Self-generated)

Pseudo-second order kinetic model plot for Cd (II) biosorption by *Escherichia coli*. The graph displays t/qt against contact time, with the slope and intercept used to calculate kinetic constants

Figure 3 shows the pseudo-second order kinetic model plot for Cd (II) biosorption. The t/qt versus time relationship indicates a reasonable fit, though slightly less accurate than the pseudo-first order model. This comparison aids in identifying the dominant adsorption mechanism.

Kinetic modelling: Kinetic curves fitted both pseudo-first and pseudo-second order models reasonably; pseudo-first order produced a slightly better R^2 and q_{calc} agreement with q_{exp} for these data (Table 2)³⁵.

Table 2 presents the kinetic parameters for Cd (II) biosorption by *Escherichia coli*. It compares pseudo-first order and pseudo-second order model fits, showing calculated adsorption capacities, rate constants, and correlation coefficients. The data indicate a better fit for the pseudo-first order model.

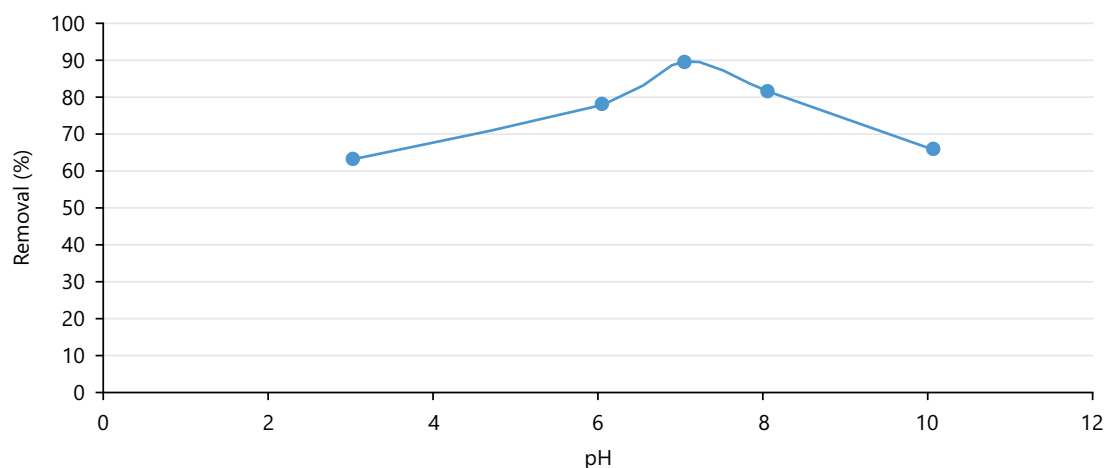


Fig. 4: Effect of pH on the biosorption of Cd ions by *Escherichia coli* isolated from a plastic recycling plant (Self-generated)

Effect of pH on Cd (II) biosorption by *Escherichia coli*. The curve shows percentage removal across pH values, with each point representing the mean of triplicate measurements

Table 2: Kinetic parameters for the biosorption of Cd ions by *Escherichia coli* isolated from a plastic recycling plant

Kinetic models	Cd (II)
$q_{e,exp}$ (mg/g)	48.83
Pseudo-first order	
$q_{e,cal}$ (mg/g)	46.214
K_1 , (min ⁻¹)	0.031
R^2	0.961
Pseudo-second order	
$q_{e,cal}$ (mg/g)	30.21
K_2 (g/mg/min)	0.125
h (mg/g/min)	1.220
R^2	0.947

Kinetic model parameters for Cd (II) biosorption by *Escherichia coli*, Values include experimental and calculated q_e , rate constants (K_1 , K_2), initial sorption rate (h), and R^2 for each model

Table 3: Equilibrium isotherm parameters for the bio sorption of Cd ions by *Escherichia coli* isolated from a plastic recycling plant

Isotherm model	Cd (II)
Langmuir model	
q_L (mg/g)	50.013
K_L (L/mg)	0.210
R^2	0.924
Freundlich model	
K_F (L/g)	1.202
$1/n$	0.201
R^2	0.873

Equilibrium isotherm parameters for Cd (II) biosorption by *Escherichia coli*. Langmuir constants (q_L , K_L) and Freundlich constants (K_F , $1/n$) are shown with corresponding R^2 values

Isotherm modelling: Equilibrium data fitted best to the Langmuir model (high R^2), indicating monolayer adsorption on finite binding sites. Freundlich constants indicated heterogeneity consistent with biological sorbents (Table 3)³⁶.

Figure 4 depicts the effect of solution pH on Cd (II) biosorption, maximum uptake occurs at pH 7, with reduced adsorption at both acidic and alkaline extremes. This trend reflects the influence of proton competition and metal precipitation on biosorption efficiency.

Figure 5 presents the effect of initial Cd (II) concentration on biosorption capacity, Adsorption capacity increases with concentration until reaching a plateau, indicating sorbent saturation. This behaviour is characteristic of monolayer adsorption systems.

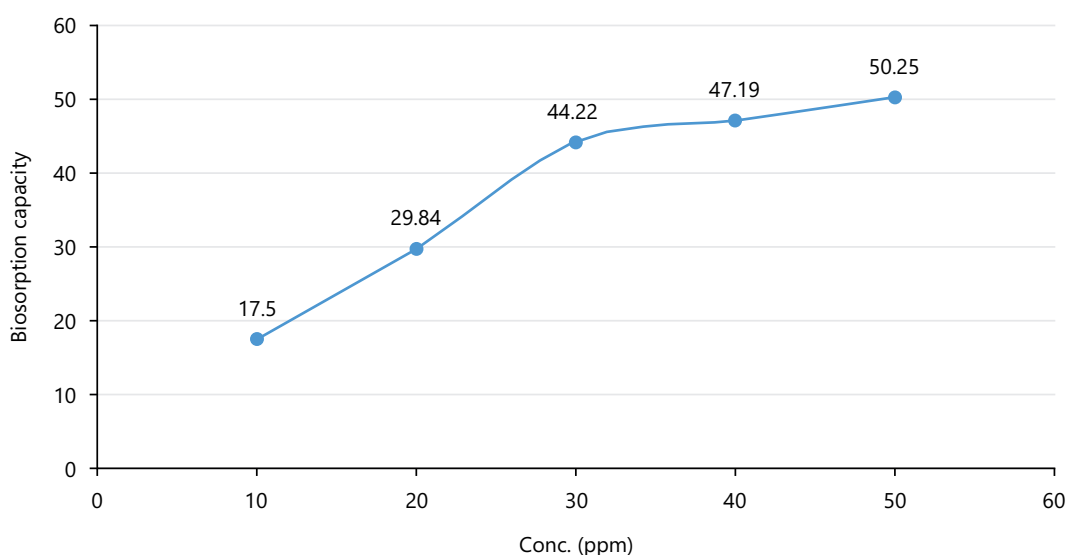


Fig. 5: Effect of Cd (II) ion concentration on the biosorption capacity of *Escherichia coli* isolated from a plastic recycling plant (Self-generated)

Effect of initial Cd (II) concentration on biosorption capacity of *Escherichia coli*. The plot shows q_e values at varying concentrations, with data points representing mean triplicate results

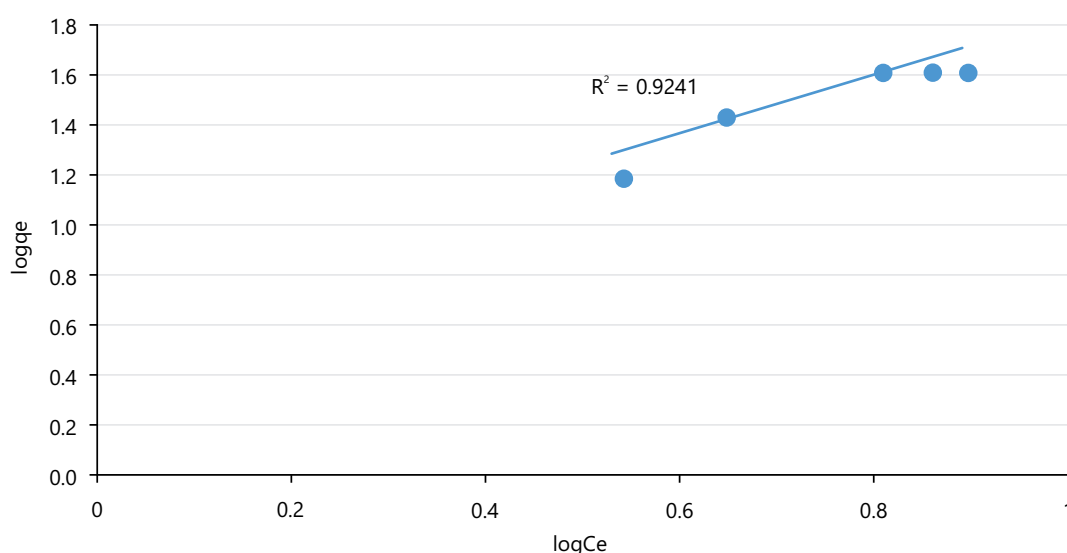


Fig. 6: Langmuir isotherm model plot for the biosorption of Cd (II) ions by *Escherichia coli* isolated from a plastic recycling plant (Self-generated)

Langmuir isotherm plot for Cd (II) biosorption by *Escherichia coli*. The graph displays $\log C_e$ versus $\log q_e$, with the slope and intercept used to determine Langmuir constants

Figure 6 shows the Langmuir isotherm model plot for Cd (II) biosorption, The linear relationship supports the assumption of monolayer adsorption on homogeneous binding sites. The high correlation coefficient confirms the model's suitability.

Figure 7 illustrates the Freundlich isotherm model plot for Cd (II) biosorption The plot indicates surface heterogeneity and multilayer adsorption potential. Although the fit is slightly lower than Langmuir's, it provides complementary insight into sorption behaviour.

Table 3 summarises the Equilibrium isotherm parameters for Cd (II) biosorption, Langmuir constants indicate high monolayer adsorption capacity, while Freundlich constants suggest surface heterogeneity. The higher R^2 value for Langmuir confirms its superior fit to the experimental data.

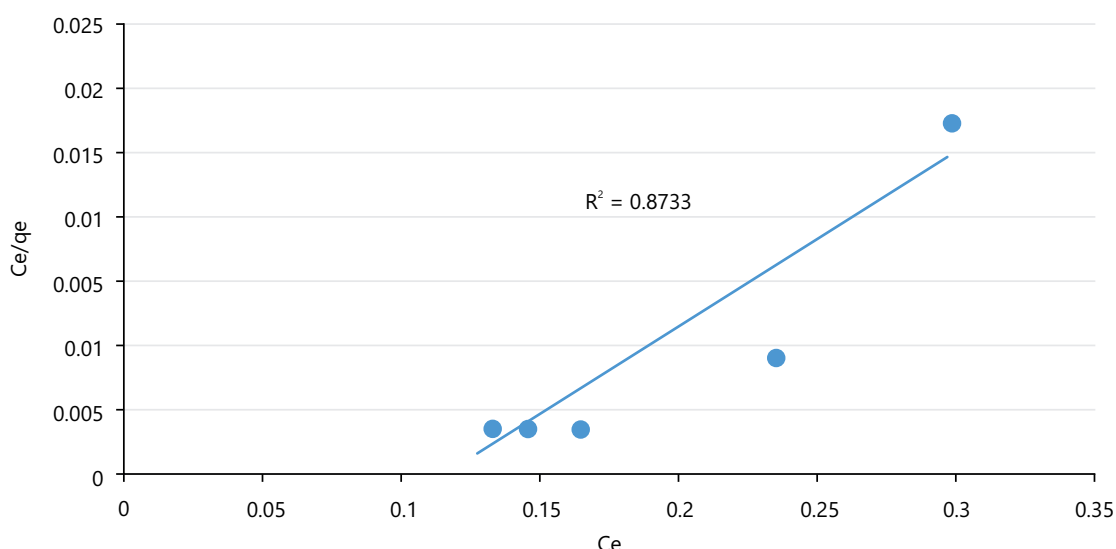


Fig. 7: Freundlich isotherm model plot for the bio sorption of Cd ions by *Escherichia coli* isolated from a plastic recycling plant

Freundlich isotherm plot for Cd (II) biosorption by *Escherichia coli*. The graph shows C_e/q_e versus C_e , with slope and intercept used to calculate Freundlich constants

DISCUSSION

This study, evaluated the ability of *Escherichia coli* biomass, collected from a plastic recycling site, to remove Cd (II) from water. Experiments show a maximum adsorption capacity (q_m) of 50.013 mg/g, an optimum pH of about 7, and an approach to equilibrium within roughly 24 to 28 hrs. The equilibrium data fit a Langmuir-type isotherm and the kinetic behavior is best described by a pseudo-first-order model.

Cd (II) uptake is highest near neutral pH and declines at low pH fits well with the mechanistic picture reported by Patel¹⁶ and others. Those authors show how pH controls metal speciation and the ionization state of surface functional groups, so proton competition at acidic pH naturally reduces available binding sites. Tran *et al.*²⁹ also caution that apparent increases in removal at high pH can sometimes reflect metal precipitation rather than true sorption. Taken together, these studies support our interpretation that pH 7 most reliably represents true biosorptive binding rather than an artifact of solution chemistry.

The kinetic profile we observed a rapid initial uptake over the first few hours followed by a slower approach to equilibrium, is consistent with many reports on microbial and plant-based sorbents. Bullen *et al.*¹⁷ and Foo and Hameed³⁰ describe how an early, fast phase is often controlled by surface adsorption and film diffusion, while later uptake reflects intraparticle diffusion or site reorganization. Our data show a slightly better fit to a pseudo-first-order model, which plausibly indicates that physical adsorption and diffusion processes dominate under our conditions rather than exclusive chemisorption. This interpretation aligns with the kinetic analyses reported by Bullen *et al.*¹⁷ and with broader reviews summarized by Foo and Hameed³⁰.

The equilibrium behavior favoring a Langmuir-type isotherm suggests monolayer adsorption on a finite number of relatively uniform sites. Similar Langmuir type fits have been reported for a variety of biological sorbents: Dias *et al.*⁷ reported Langmuir behavior for nutshell-derived materials, and Zhang *et al.*¹⁵ observed comparable fits for alginate-based composites. The q we measured, around 50 mg/g, places our *E. coli* biomass in a competitive range when compared with many low-cost sorbents. For example, Tatah *et al.*¹⁰ report capacities for several agricultural residues in a similar range, and engineered biocomposites evaluated by Park *et al.*¹⁴ and Zhang *et al.*¹⁵ show comparable performance.

Practical trade-off commonly seen in batch sorption work: raising biomass dose increases total percent removal but can reduce adsorption per unit mass. Patel¹⁶ and Foo and Hameed³⁰ explain this phenomenon as resulting from overlapping diffusion layers, reduced driving force per unit mass, and site aggregation at high sorbent loadings. These insights will guide how we scale the system: higher sorbent doses improve effluent quality but may be less efficient on a mass basis.

Sourcing biomass from a recycling site adds a sustainability dimension to our work. Fabre *et al.*¹⁸ and Boakye *et al.*¹⁹ advocate valorizing waste biomass for remediation, and our results show that such an approach can yield competent biosorbents. Recent reviews on bacterial biosorbents by Pham *et al.*³⁴ and Rizvi *et al.*³⁵ reinforce the idea that bacterial biomass can be scaled while reminding us to address regeneration, stability, and biosafety before field deployment.

There are methodological points to acknowledge. Tran *et al.*²⁹ remind us not to overinterpret model fits when relying only on linearized plots or R^2 values. We used both linear and nonlinear fitting approaches and reported error metrics, which strengthens confidence in our conclusions. Nevertheless, targeted follow up work would make our mechanistic claims more robust. I recommend thermodynamic studies, surface characterization by FTIR or XPS, and column-scale trials as suggested by Zhou *et al.*²⁵ to validate batch findings under continuous flow and in complex matrices. Multi-metal and real wastewater experiments will also be essential because competitive sorption can alter both capacity and selectivity.

In summary, our findings are consistent with established biosorption principles: pH dependence, rapid initial uptake with diffusion-limited equilibration, Langmuir type equilibrium behavior, and competitive q_m values. The novel contribution of this study is showing that *E. coli* biomass sourced from a recycling environment is a promising, low-cost biosorbent. Based on these results, column experiments, regeneration studies, and targeted surface analyses are being conducted to advance toward practical application.

CONCLUSION

This study confirms that *Escherichia coli* isolated from a plastic recycling plant demonstrates strong biosorption potential for Cd (II) ions under controlled laboratory conditions. Maximum removal efficiency was achieved at neutral pH, with equilibrium attained within 24-28 hrs. The biosorption behavior followed the Langmuir isotherm and pseudo-first-order kinetic models, indicating monolayer adsorption and a diffusion-driven mechanism. These results establish *E. coli* biomass as an effective and low-cost biosorbent for cadmium removal in wastewater treatment.

Further research should explore the regeneration and reuse potential of the biomass and conduct pilot-scale column experiments to evaluate performance under continuous flow conditions. Integrating this biosorbent into modular treatment systems may provide scalable and sustainable solutions for industrial effluents, particularly in resource-limited regions. Moreover, molecular-level investigations of metal-binding mechanisms would deepen understanding and support optimization for broader heavy metal remediation applications.

SIGNIFICANCE STATEMENT

Heavy metal contamination, particularly cadmium in water, remains a critical environmental and public health issue requiring affordable and sustainable remediation strategies. This study demonstrates that *Escherichia coli* biomass obtained from a plastic recycling site effectively removes Cd (II) ($q \approx 50.0$ mg/g), achieving optimal uptake at approximately neutral pH (≈ 7) with consistent kinetic and equilibrium performance. These findings highlight that waste-derived microbial biomass can perform comparably to other low-cost sorbents and can be readily integrated into existing treatment workflows. The proposed approach aligns with circular economy principles and offers a viable pathway toward pilot-scale testing, multi-metal evaluations, and deployment in resource-constrained environments.

ACKNOWLEDGMENT

The authors gratefully acknowledge the Department of Biochemistry, Faculty of Biosciences, Federal University Wukari, Taraba State, Nigeria, for providing the laboratory facilities and technical support necessary for the successful completion of this research. Special thanks go to the staff of the Microbiology Laboratory for their assistance during the microbial analysis and batch adsorption experiments. We also extend our appreciation to the management of the plastic recycling facility in Wukari for granting access to sample collection.

REFERENCES

1. Singh, N. and T.R. Walker, 2024. Plastic recycling: A panacea or environmental pollution problem. *npj Mater. Sustainability*, Vol. 2. 10.1038/s44296-024-00024-w.
2. Khajvand, M., A.K. Mostafazadeh, P. Drogui and R.D. Tyagi, 2022. Management of greywater: Environmental impact, treatment, resource recovery, water recycling, and decentralization. *Water Sci. Technol.*, 86: 909-937.
3. Bisht, A., N. Kamboj, V. Kamboj and A. Bisht, 2020. A review on the role of emerging anthropogenic activities in environmental degradation and emphasis on their mitigation. *Arch. Agric. Environ. Sci.*, 5: 419-425.
4. Hussain, A., S. Madan and R. Madan, 2021. Removal of Heavy Metals from Wastewater by Adsorption. In: *Heavy Metals-Their Environmental Impacts and Mitigation*, Nazal, M.K. and H. Zhao (Eds.), IntechOpen, London, United Kingdom, ISBN: 978-1-83968-122-6.
5. Shamim, S., 2018. Biosorption of Heavy Metals. In: *Biosorption*, Derco, J. and B. Vrana, IntechOpen, London, United Kingdom, ISBN: 978-1-78923-473-2, pp: 21-49.
6. Al-Ghouti, M.A. and D.A. Da'ana, 2020. Guidelines for the use and interpretation of adsorption isotherm models: A review. *J. Hazard. Mater.*, Vol. 393. 10.1016/j.jhazmat.2020.122383.
7. Dias, M., J. Pinto, B. Henriques, P. Figueira and E. Fabre *et al.*, 2021. Nutshells as efficient biosorbents to remove cadmium, lead, and mercury from contaminated solutions. *Int. J. Environ. Res. Public Health*, Vol. 18. 10.3390/ijerph18041580.
8. Chakraborty, R., A. Asthana, A.K. Singh, B. Jain and A.B.H. Susan, 2022. Adsorption of heavy metal ions by various low-cost adsorbents: A review. *Int. J. Environ. Anal. Chem.*, 102: 342-379.
9. Silas, T.V., E.C. Stephen, M.A. Abah, A.S. Michael, U.J. Isaac and R.Y. Enochone, 2023. Growth indices of seeds (maize and cowpea) grown in heavy metal contaminated soil treated with ginger extract. *Toxicol. Adv.*, Vol. 5. 10.53388/TA202305017.
10. Tatab, V.S., K.L.C. Ibrahim, C.S. Ezeonu and O. Otitoju, 2017. Biosorption kinetics of heavy metals from fertilizer industrial waste water using groundnut husk powder as an adsorbent. *J. Appl. Biotechnol. Bioeng.*, 2: 221-228.
11. Silas, T.V. and A.S. Osagie, 2023. Biosorption of Fe (II) and Pb (II) on unmodified *Senna tora*: Isotherm and kinetic modeling. *Magna Sci. Adv. Res. Rev.*, 8: 92-103.
12. Silas, T.V. and A.S. Osagie, 2023. Biosorption of Cu (II) and Pb (II) ions using acid modified *Senna tora* pods with a focus on isotherms and kinetics studies. *GSC Adv. Res. Rev.*, 16: 252-259.
13. Silas, T.V. and A.S. Osagie, 2023. Biosorption isotherm and kinetic studies for the removal of Pb (II) and Fe (II) ions from synthetic waste water using unmodified *Dennettia tripetala*. *GSC Biol. Pharm. Sci.*, 24: 319-328.
14. Park, S., J.W. Lee, J.E. Kim, G. Kang, H.J. Kim, Y.K. Choi and S.H. Lee, 2022. Adsorptive behavior of Cu²⁺ and benzene in single and binary solutions onto alginate composite hydrogel beads containing pitch pine-based biochar. *Polymers*, Vol. 14. 10.3390/polym14173468.
15. Zhang, X., R. Shan, X. Li, L. Yan, Z. Ma, R. Jia and S. Sun, 2021. Effective removal of Cu(II), Pb(II) and Cd(II) by sodium alginate intercalated MgAl-layered double hydroxide: Adsorption properties and mechanistic studies. *Water Sci. Technol.*, 83: 975-984.

16. Patel, H., 2022. Comparison of batch and fixed bed column adsorption: A critical review. *Int. J. Environ. Sci. Technol.*, 19: 10409-10426.
17. Bullen, J.C., S. Saleesongsom, K. Gallagher and D.J. Weiss, 2021. A revised pseudo-second-order kinetic model for adsorption, sensitive to changes in adsorbate and adsorbent concentrations. *Langmuir*, 37: 3189-3201.
18. Fabre, E., C. Vale, E. Pereira and C.M. Silva, 2021. Sustainable water treatment: Use of agricultural and industrial wastes to remove mercury by biosorption. *Water Air Soil Pollut.*, Vol. 232. 10.1007/s11270-021-05165-5.
19. Boakye, P., G. Ohemeng-Boahen, L. Darkwah, Y.A. Sokama-Neuyam and E. Appiah-Effah *et al.*, 2022. Waste biomass and biomaterials adsorbents for wastewater treatment. *Green Energy Environ. Technol.*, Vol. 2022. 10.5772/geet.05.
20. Min, H.S. and S. Ray, 2024. Removal of mercury ions from wastewater using different techniques. *Int. J. Eng. Trends Technol.*, 72: 21-34.
21. Neag, E., A.I. Török, C. Tanaselia, I. Aschilean and M. Senila, 2020. Kinetics and equilibrium studies for the removal of Mn and Fe from binary metal solution systems using a Romanian thermally activated natural zeolite. *Water*, Vol. 12. 10.3390/w12061614.
22. Sarwuan, A.F., E.Z. Angyu and E.C. Tooichi, 2015. Variations in climate change indicators and implications on forest resources management in Taraba State, Nigeria. *Agric. For. Fish.*, 4: 252-256.
23. Li, M.N., Q. Han, N. Wang, T. Wang and X.M. You *et al.*, 2024. 16S rRNA gene sequencing for bacterial identification and infectious disease diagnosis. *Biochem. Biophys. Res. Commun.*, Vol. 739. 10.1016/j.bbrc.2024.150974.
24. Chhetri, S., M.T. Sherpa and L. Sharma, 2025. Characterization of plant growth promoting bacteria isolated from rhizosphere of tomato cultivated in Sikkim Himalaya and their potential use as biofertilizer. *Sci. Rep.*, Vol. 15. 10.1038/s41598-025-98953-6.
25. Zhou, Y., W. Liu, D. Chen, B. Liu, P. Lu and Y. Zhang, 2025. Simultaneous remediation of As(V), Cd(II) and Pb(II) in aqueous solution and soil using Fe/Ca-modified biochar. *Waste Manage. Res.*, 43: 1206-1218.
26. Zhao, J., S. Wang, L. Zhang, C. Wang and B. Zhang, 2018. Kinetic, isotherm, and thermodynamic studies for Ag(I) adsorption using carboxymethyl functionalized poly(glycidyl methacrylate). *Polymers*, Vol. 10. 10.3390/polym10101090.
27. Wang, J. and X. Guo, 2023. Adsorption kinetics and isotherm models of heavy metals by various adsorbents: An overview. *Crit. Rev. Environ. Sci. Technol.*, 53: 1837-1865.
28. Al-Homaidan, A.A., H.J. Al-Houri, A.A. Al-Hazzani, G. Elgaaly and N.M.S. Moubayed, 2013. Biosorption of copper ions from aqueous solutions by *Spirulina platensis* biomass. *Arabian J. Chem.*, 7: 57-62.
29. Tran, H.N., S.J. You, A. Hosseini-Bandegharaei and H.P. Chao, 2017. Mistakes and inconsistencies regarding adsorption of contaminants from aqueous solutions: A critical review. *Water Res.*, 120: 88-116.
30. Foo, K.Y. and B.H. Hameed, 2010. Insights into the modeling of adsorption isotherm systems. *Chem. Eng. J.*, 156: 2-10.
31. Nthwane, Y.B., B.G. Fouda-Mbanga, M. Thwala and K. Pillay, 2025. A comprehensive review of heavy metals (Pb²⁺, Cd²⁺, Ni²⁺) removal from wastewater using low-cost adsorbents and possible revalorisation of spent adsorbents in blood fingerprint application. *Environ. Technol.*, 46: 414-430.
32. Wang, Z., S. Song, H. Wang, W. Yang, J. Han and H. Chen, 2022. Feasibility of remediation of heavy-metal-contaminated marine dredged sediments by active capping with enteromorpha biochar. *Int. J. Environ. Res. Public Health*, Vol. 19. 10.3390/ijerph19094944.
33. Mahlangu, D., K. Mphahlele, F. de Paola and N.H. Mthombeni, 2024. Microalgae-mediated biosorption for effective heavy metals removal from wastewater: A review. *Water*, Vol. 16. 10.3390/w16050718.

34. Pham, V.H.T., J. Kim, S. Chang and W. Chung, 2022. Bacterial biosorbents, an efficient heavy metals green clean-up strategy: Prospects, challenges, and opportunities. *Microorganisms*, Vol. 10. 10.3390/microorganisms10030610.
35. Rizvi, A., B. Ahmed, A. Zaidi and M.S. Khan, 2020. Biosorption of heavy metals by dry biomass of metal tolerant bacterial biosorbents: An efficient metal clean-up strategy. *Environ. Monit. Assess.*, Vol. 192. 10.1007/s10661-020-08758-5.
36. Song, Z., Y. Liu, L. Liu, C. Yang and W. Tian *et al.*, 2024. Reusable magnetically-modified *Enteromorpha prolifera*-based biochar hydrogels: Competitive removal mechanism for metal-organic dye composite contaminants. *Carbon Res.*, Vol. 3. 10.1007/s44246-023-00098-6.